Bespoke drawers Order form solid wood



Request	Order	Desired delivery	Ref. / Commission	Häfel	Häfele customer no.		Sales office				
							Jönköping, SWEDEN				
Company:			Pe	erson in	charge:					4	3 10 1
Address:			Те	INo.:							
-			E-	mail:							
					e.g.	Pos 1	Pos 2	Pos 3	Pos 4	Pos 5	Pos 6
Quantitiy (pieces)				3						
Type of drawer CLASSIC drawers: SE-50 / 51 / 52 / 53 inner dra.: SE-54 / 61 / 65 / 66; low-front: SE-56 / 63 / 64 pull-out (with rails): SE-72 / 73; drawer-box: SE-55 / 90 wardrobe solution ,plus': SE-20 / 21 / 22 / 29 PREMIUM: SE-40 / 41 / 42 / 43 / 44 / 45 / 46 ECO: SE-12 / SE-13 / SE-16					53						
	inet width (m vely drawer w		Please specify the inside cabninet width or <u>alternat</u> the desired width of the d		862						
alternativ	inet depth (m vely nominal vely drawer d	length of runner (mm)	Please note runner length (see below)! Note on drawer depth: dra for front fixing are 10 mm deep than runners, inner 3 mm deeper than runner	awers less drawers	550						
Height of c	drawer frame	without runner (mm)			115						
Type of wo steamed be knotty oak	ood eech [SBE] / pale 'prime' [KOP] / oa	/ 160 / 190 / 220 / 250 / 250 / beech [PBE] / maple [MA] / o k 'character' [OKC] / americ. v ed elm [ELM] / pine [PIN]	ak [OK] / smoaked oak [S0		EIC						
Surface nature-lacc lacquered	quered [L] / oiled a [NL] / whitish-lacq	nd waxed [Ö] / nature-effect- uered ¹ [WL] / grey-whitish- ed [WÖ] ³ / raw, sanded [R]	¹ for beech, maple, birch & ² for oak ³ for beech, maple, birch, birch & ash		GL						
Machining drilled [B] /	front fixing	ng dowels [C]	Only drawers (SE-40 / 43 52 / 53 / 72 / 73)	5 / 51 /	В						
Machining A/B/C/D	Machining handle millings / borings Only inner drawers (SE-16 / 41 44 / 46 / 54 / 55 / 61 / 65 / 66) A / B / C / D / F / handle borings [B64 / B96 /] Preview on page 5!										
Bottom loc	ose bottom										
Bottom rei	nforced bottor	n (8 mm plywood)	Standard: 5 mm Fupla		Х						
with Blumo	em - part extention soft close [B] incl. synchronisat	/ with TipOn [T] /	Runner lengths: 270, 300 400, 450, 500, 550, 600*, *only without Blumotion s close available	, 650*							
with Blumo	em - full exten tion soft close [B] incl. synchronisat	/ with TipOn [T] /	Runner lengths: 250, 270 320, 350, 380, 400, 420, 480, 500, 520, 550, 600								
with Blumo	em - full exten tion soft close [B] incl. synchronisat	/ with TipOn [T] /	Runner lengths: 450, 500 550, 580, 600, 650, 700,								
with Blumo incl. synchr	ronisation [TS] / w	nsion 40 kg / with TipOn [T] / with TipOn ith TipOn-Blumotion [TB] / nchronisation [TBS]	Runner lengths: 250*, 27 320, 350, 380, 400, 420, 480, 500, 520, 550, 600 *not as "TipOn-Blumotion	450,	TBS						
with Blumo incl. synchr	tion soft close [B] ronisation [TS] / w	nsion 60 / 70 kg / with TipOn [T] / with TipOn ith TipOn-Blumotion [TB] / nchronisation [TBS]	Runner lengths: 450, 500 550, 580, 600, 650, 700*, *60 kg maximum load	, 520, 750*							
	ose [S] / with TipN	nsion 40 / 50 kg latic [T] / with TipMatic incl.	Runner len.: 250, 270, 30 350, 380, 400, 420, 450, 4 500, 520, 550, 600, 700*, *50 kg maximum load	480,							
		nsion 70 kg latic [T] / with TipMatic incl.	Runner lengths: 450, 500 550, 580, 600, 650	, 520,							
Optio ns			Please make a cross and on the attached sheet.	l define							
Laser-Log	o ht [R] / both sides	[B]	A one-time charge for set sampling applies to the fir								




Note: On this page you can add more items to your order or inquiry.

	e.g.	Pos 7	Pos 8	Pos 9	Pos 10	Pos 11	Pos 12	Pos 13	Pos 14	Pos 15
Quantity (pieces)	3									
Type of drawer	53									
Inside cabinet width (mm)	862									
alternatively drawer width (mm)										
Inside cabinet depth (mm)										
alternatively nominal length of runner (mm)	550									
alternatively drawer depth (mm)										
Height of drawer frame without runners (mm)	115									
Type of wppd	EIC									
Surface	L									
Machining front fixing	В									
Machining handle millings / borings										
Bottom loose bottom										
Bottom reinforced bottom (8 mm plywood)	X									
Blum Tandem - part extension 30 kg with Blumotion soft close [B] / with TipOn [T] / with TipOn incl. synchronisation [TS]										
Blum Tandem - full extension 30 kg with Blumotion soft close [B] / with TipOn [T] / with TipOn incl. synchronisation [TS]										
Blum Tandem - full extension 50 kg with Blumotion soft close [B] / with TipOn [T] / with TipOn incl. synchronisation [TS]										
Blum Movento - full extension 40 kg with Blumotion soft close [B] / with TipOn [T] / with TipOn incl. synchronisation [TS] / with TipOn-Blumotion [TB] / with TipOn-Blumotion incl. synchronisation [TBS]	TBS									
Blum Movento - full extension 60 / 70 kg with Blumotion soft close [B] / with TipOn [T] / with TipOn incl. synchronisation [TS] / with TipOn-Blumotion [TB] / with TipOn-Blumotion incl. synchronisation [TBS]										
Grass Dynapro - full extension 40 / 50 kg with Soft-close [S] / with TipMatic [T] / with TipMatic incl. synchronisation [TS]										
Grass Dynapro - full extension 70 kg with Soft-close [S] / with TipMatic [T] / with TipMatic incl. synchronisation [TS]										
Options										
Laser-Logo left [L] / right [R] / both sides [B]										

Bespoke drawers Appendix for options





			for	Pos	Cutlery	Knifes	F	oil	Spices	;	Tins
Cutlery insert SmartLine*		tlery insert lassicLine	e	e.g.	Х	Х	>	X			
or plea make a											
available for 490 and 590 mm deep drawers											
	for Pos	Lengthwise fixed	Length va	riable	Crosswise fixe	d Crosswise	loose	Cross	sed fixed	Doubl	e cros
	1011.03	Lenguiwise likeu	Longui. va	linabio	0.00000			0.000			0 0103




Illustration shows "lengthwise variable"

Insert mats & leather bottom	

Siphon cut-out

Note: Change/correction compared to older versions - note sketch!

Lock milling

for Pos

e.g.

AL (distance left)

250

for Pos	Needlefelt grey-melted	Anti-slip black	Imit. leather anthracite
e.g.	×		

AR (distance right)

380



The digital version of this form, information material, type descriptions, drawings and installation aids are available from your Häfele sales office.

Do you need help or advice?

Call us +46 36 180 088

or send us an e-mail info@hafele.se

How to order

AT (depth from back)

220

Please complete the order form directly on your PC or write your order by hand on a printed copy and send it to us

... via e-mail info@hafele.se


for Pos	AL (distance left)	AR (distance right)	AT (height from top)
z.B.	295	270	120

Comments

Bespoke drawers Product overview solid wood drawers




Classic

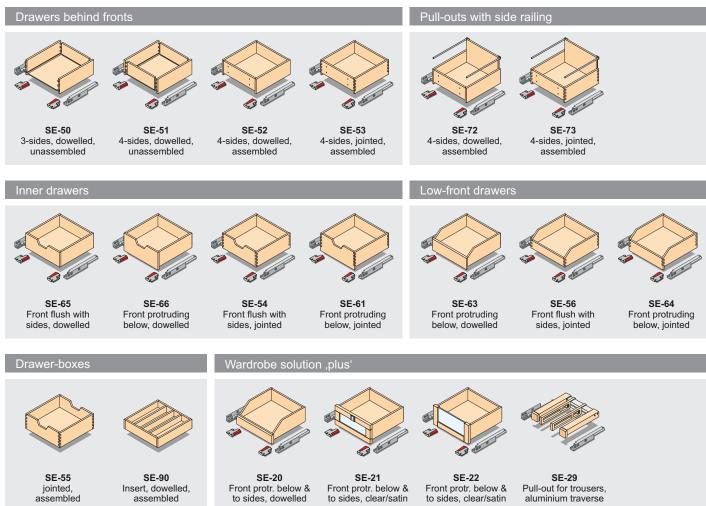

Premium

Premium drawers are sanded flat on the top side after assembly. All edges are slightly broken. The bottom made of 8 mm thick veneer board is grooved and glued on 4 sides. The joint spacing is fine and even. The drawers SE-40, SE-41 and SE-42 are supplied with semi-concealed dovetail joints. The front piece of the SE-46 internal drawer is tapped so that it can protrude to the side and conceal the runner.

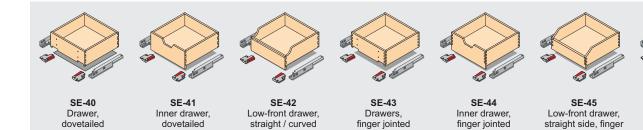

Eco

Eco drawers are produced similarly to decor drawers and are only available with dowelled corner joints. The drawers are already primed in the profile on both sides and are therefore not sanded flush after assembly. Due to tolerances, there may be a small offset between the front/rear piece and the sides. Eco drawers are only available in the wood types "Steamed beech" and "Oak character".



SE-12 Drawer. dowelled

SE-13 Pull-out, dowelled



side, dovetailed

SE-16 Inner drawer, dowelled

1 C.B

SE-46

Inner drawer,

protruding on 4

sides, tapped

jointed

Bespoke drawers Product overview solid wood drawers



Machinings

Handle millings / borings



mechanical and

chemical stresses

 chemical stresses

chemical stresses

More information

The digital version of this form, information material,

type descriptions, drawings and installation aids

are available from your Häfele sales office.



Form B

round

Form A slotted hole F

Form C diagonally tapered Form D v-form Form F straight






Handle borings 64 / 96 / 128 / 160 /

192 mm distance



Single boring one single boring, centred

Types of wood & surfaces

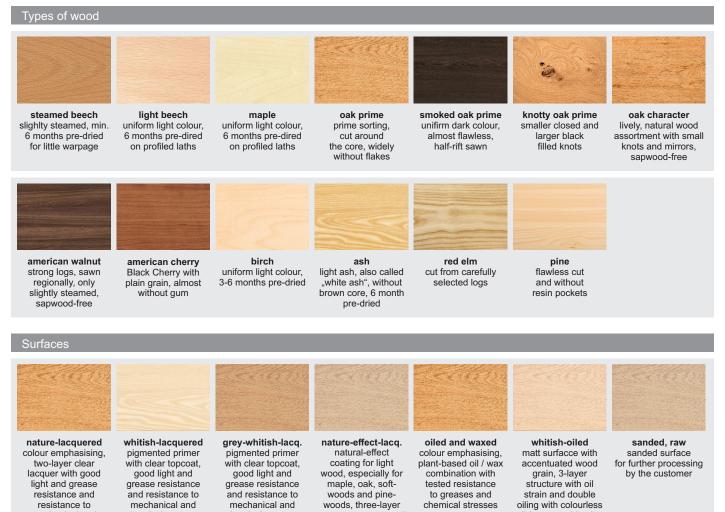

structure, open-pored,

brightening, scratch-

resistant, dull matt and with light protection

Do you need help or advice?

oil / wax combination

on the same basis as

the surface "oiled and waxed"

> Call us +46 36 180 088

or send us an e-mail info@hafele.se Version: 20230530